

# CROWN OPTO S4



Balt led



## ITEM DESCRIPTION

In front of you – technical information of our newest addition to Crown OPTO S family – Crown OPTO S4. Observing your fascinating interest with S family we have decided to extend the product line and provide you with modules for bigger depths as well. This is how S3 and S4 has emerged. With great efficiency up to 105 lm/W, impressive distance between the modules, S4 should be considered when you want to illuminate boxes or letters of bigger depths and need more brightness.

## APPLICATION

- Channel letters signs and light boxes
- Recommended depth 140 – 300 mm


## FEATURES & BENEFITS

- Efficiency up to 105 lm/W
- IP67 protection class
- White, red, green and blue colours are available
- 5 year warranty

## GENERAL SPECIFICATIONS


SUPPLY VOLTAGE	12 VDC
POWER	1.6; 2 W
RECOMMENDED DEPTH	From 140 to 300 mm
CC DISTANCE	340 mm
BINNING	3 SDCM
OPERATING TEMPERATURE	-30 °C ~ +50 °C
STORAGE TEMPERATURE	-40 °C ~ +70 °C
STORAGE CONDITIONS	Relative humidity <60%
LIFETIME	L70 50,000 h
WARRANTY	5 years (24/7)*

\*Warranty is applied only and if storage, mounting and maintenance conditions, stated in the installation guide, are followed.

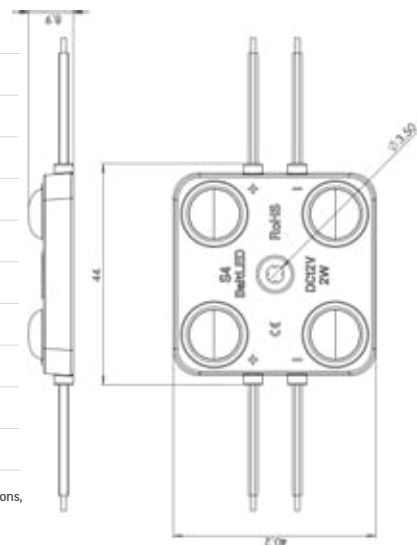

\* Dimensions are in mm

## LIGHT DISTRIBUTION GRAPH

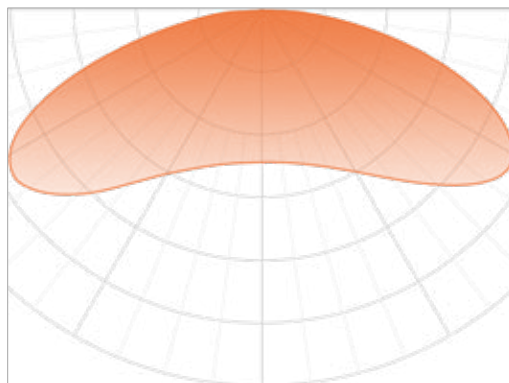

Beam angle: 160°

## ORDERING INFORMATION

SKU	POWER, W	LUMEN OUTPUT, LM	COLOR
BMP-S4-04UH160CW652	2.0	210	6500 K
BMP-S4-04UH160NW401	2.0	205	4000 K
BMP-S4-04UH160WW301	2.0	205	3000 K
BMP-S4-04UH160RC	1.6	69	red
BMP-S4-04UH160GC	2.0	134	green
BMP-S4-04UH160BC	2.0	36	blue

CHAIN	BAG	BOX
20 pcs (net weight: 0.453 kg)	60 pcs (net weight: 1.300 kg)	420 pcs (net weight: 10.000 kg)

© 2018, All rights reserved BaltLED, UAB. Specifications are subject to change without notice.