

FLAT
PET
SHEET

Marpet

Mould
& Create

 **Brett
Martin**

Design & Create

With Brett Martin's Marpet Range

The unique combination of exceptional properties that the Marpet-g FS and Marpet-a FS PET range offers enables the formation of endless shapes, making Marpet the perfect choice for print, fabrication, cold bending and thermoforming applications.

PET's exceptional processing abilities make Marpet-g FS and Marpet-a FS ideal for the sign and display industry enabling designers to realise more complex shapes, as well as for glazing and protective applications including poster covers and machine guards.

The Marpet PET range consists of Marpet-g FS PETg and Marpet-a FS aPET, two transparent polyester sheets that both offer high optical clarity and light transmission, good impact resistance, chemical resistance and fire performance.

We also offer Marpet-g FS Eco, an environmentally friendly PETg containing at least 50% regrind and Marpet-a FS AR, an aPET flat sheet with anti-reflective properties.

Marpet-g FS


Marpet-g FS Eco

Perfect for complex thermoforming

Marpet-a FS

Marpet-a FS AR

Ideal for flat and cold bending applications

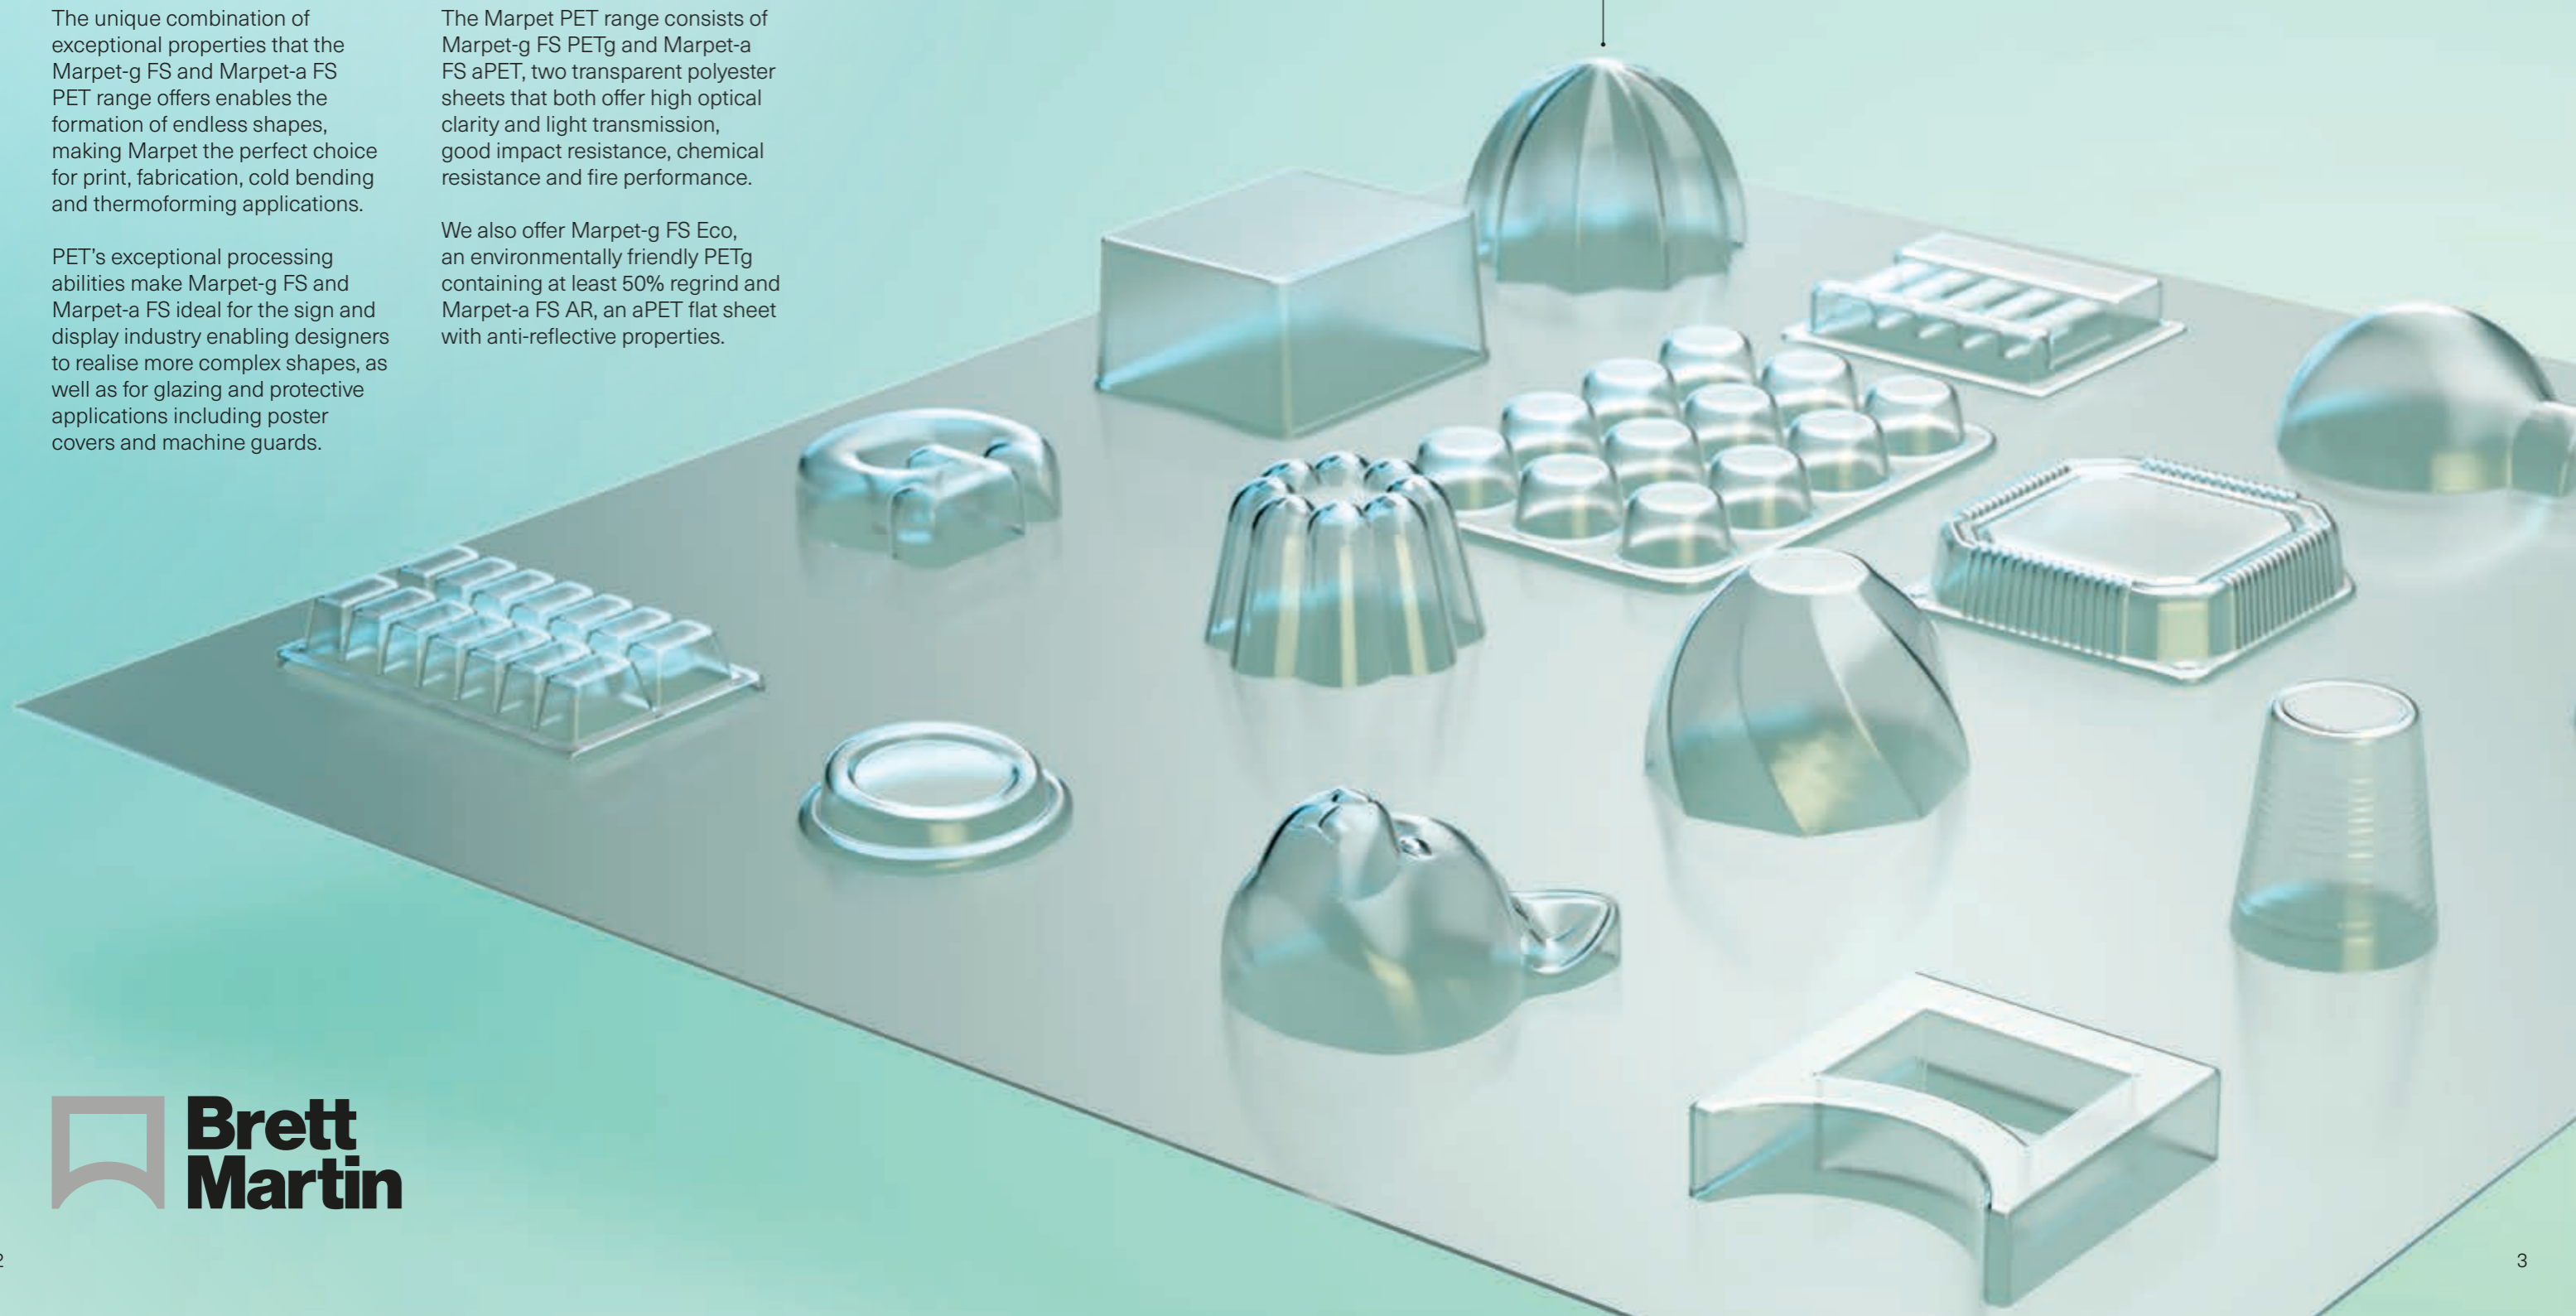

Marpet-g FS

Marpet-g FS Eco

Marpet-g FS is a clear, transparent co-polyester that can be used as an alternative to polycarbonate, acrylic and PVC sheets. Its key benefit is its exceptional ease of workability and thermoformability particularly at low temperatures which facilitates a wide range of applications.

Marpet-g FS PETg offers excellent strength to weight ratio, outstanding optical clarity, superior chemical resistance, durability, good fire performance and is 100% recyclable. Marpet-g FS is made from a resin which has food grade approval.

Marpet-g FS Eco is manufactured using at least 50% regrind, which is produced on-site under closely monitored conditions to ensure consistent quality.

Applications

- Point of sale
- Illuminated/non-illuminated signage
- Light boxes
- 3D displays & graphic arts
- Poster covers
- Non-food packaging
- Glazing
- Protective screens
- Industrial trays
- Home applications e.g. furniture and shower surrounds
- Prosthetic cheek sockets



Printing, Fabrication & Thermoforming



Marpet-g FS has the triple advantages of being suitable for digital printing, a wide range of fabrication techniques and thermoforming at relatively low temperatures without pre-drying. This allows engineers and designers to create complex shapes and end products, either with or without printing. The 15mm sheet is perfect for applications that require a deeper draw.

Chemically Resistant & Durable



Marpet-g FS exhibits superior chemical resistance which means that the product's strength, flexibility and appearance is unchanged by many chemicals, including cleaning agents, and atmospheric pollutants. This makes it suitable for applications in industrial, commercial and residential settings.

Impact Resistance



Marpet-g FS's strength to weight ratio, durability and impact resistance make it suitable for glazing applications such as machine guards, vending machines, office partitions and shower surrounds.

Eco Option Available



We believe in minimising on-site waste and reusing whatever production waste is unavoidably generated. Marpet-g FS Eco, which contains at least 50% regrind, reduces the amount of PETg waste that goes to landfill. Available in limited quantities, Marpet-g FS Eco can be processed in the same way as standard Marpet-g FS.

Product Options

Marpet-g FS

Marpet-g FS Eco

Material Properties

| Property | Standard | Value | Unit |
|------------------------------------|-------------|------------|-------------------|
| Density | ISO 1183-1 | 1.27 | g/cm ³ |
| Transmission at 3mm | ISO 13468-1 | 88 | % |
| Flexural Strength | ISO 178 | 80 | MPa |
| Tensile Strength at Yield | ISO 527 | 50 | MPa |
| Heat Deflection Temperature | ISO 75-2 | 72 | °C |
| Thermal Expansion | ISO 11359-2 | 0.065 | mm/m°C |
| Service Temperature - Long Term | - | -20 to +60 | °C |

Processing

- Digital and screen printing
- Vinyl application
- Fabrication
- Routing, milling, sawing
- Guillotining, die cutting
- Engraving
- Laser cutting
- Drilling
- Thermoforming
- Welding
- Cold curving
- Laminating
- Bonding

Marpet-g FS Product Options

| Sheet Size (mm) | Thickness (mm) |
|-----------------|--------------------------------|
| 1250 x 2050 | 0.5, 0.75, 1, 1.5 & 1.8 |
| 1250 x 2500 | 0.5, 0.75, 1, 1.5 & 1.8 |
| 2500 x 1250 | 2, 3, 4, 5, 6, 8, 10, 12 & 15* |
| 2050 x 3050 | 2, 3, 4, 5, 6, 8, 10, 12 & 15* |

*Subject to request.
Minimum order quantities may apply.



Anti-reflective option*



UV resistant option*


Marpet-g FS Eco** Product Options

| Sheet Size (mm) | Thickness (mm) |
|-----------------|----------------------|
| 1250 x 2050 | 0.5, 0.75, 1, 1.5, 2 |
| 2050 x 3050 | 2, 3 |

** Limited availability only



Clear

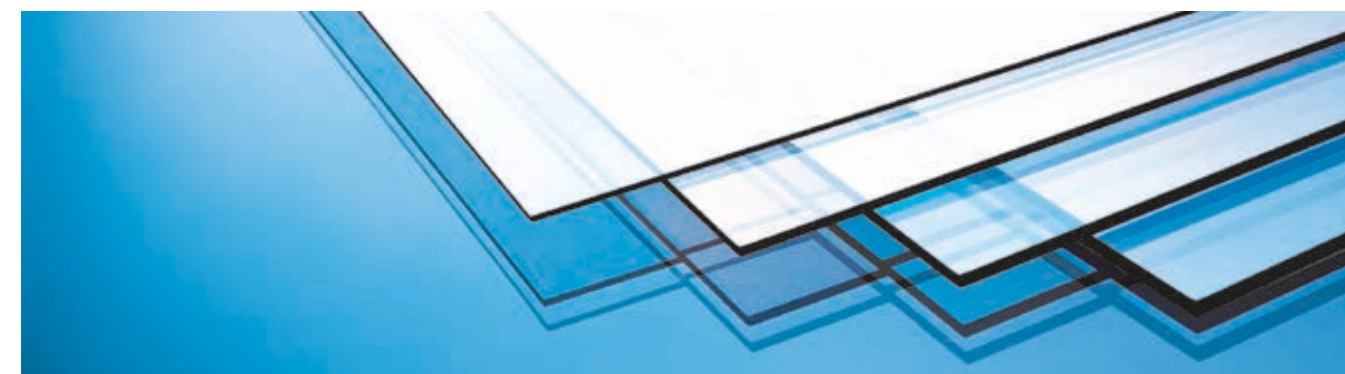

For technical and processing information go to brettmartin.com/marpetgfs or contact our Technical Department.

Marpet-a FS

Marpet-a FS AR

Marpet-a FS aPET is a high optical grade amorphous PET sheet, ideal for flat and cold bending applications. It combines exceptional quality, excellent transparency, impact strength, chemical resistance and fire performance, and is 100% recyclable, making Marpet-a FS suitable for a wide range of applications.

Applications

- Point of sale
- Illuminated/non illuminated signage
- Poster covers
- Shop fittings
- Glazing
- Cold food storage
- Protective screens
- Machine guards
- Visors

Good Scratch Resistance



Marpet-a FS exhibits very good scuff and scratch resistance which, when combined with its superior chemical resistance, makes it ideal for high traffic applications or where the end product will be frequently cleaned such as point of sale displays, shop fittings, poster covers and visors.

Easy to Cold Curve



Marpet-a FS is ideal for flat and cold bending applications. Its ability to cost effectively machine and cold bend makes it particularly well suited to the fabrication of items for the visual communication sector including Point of Sale display stands, poster glazing and illuminated signs.

Excellent Transparency



Marpet-a FS's transparency and optical clarity make it suitable for applications where clear vision is of the utmost importance, such as visors, machine guards, protective screens and poster covers.

Anti-reflective Properties



Marpet-a FS is available with an anti-reflective surface. Combined with Marpet-a FS's light transmission of 86% at 3mm, this makes it ideal for picture framing and poster covers.

Product Options

**Marpet-a
FS**

**Marpet-a
FS AR**

Material Properties


| Property | Standard | Value | Unit |
|------------------------------------|-------------|------------|-------------------|
| Density | ISO 1183-1 | 1.33 | g/cm ³ |
| Transmission at 3mm | ISO 13468-1 | 86 | % |
| Flexural Strength | ISO 178 | 86 | MPa |
| Tensile Strength at Yield | ISO 527 | 55 | MPa |
| Heat Deflection Temperature | ISO 75-2 | 67 | °C |
| Thermal Expansion | ISO 11359-2 | 0.065 | mm/m°C |
| Service Temperature - Long Term | - | -20 to +60 | °C |

Processing

- Screen printing
 - Vinyl application
 - Fabrication
 - Routing, milling, sawing
 - Guillotining, die cutting
 - Laser cutting
- Engraving
 - Drilling
 - Welding
 - Cold curving
 - Laminating
 - Bonding

Product Options

| Sheet Size (mm) | Thickness (mm) |
|-----------------|------------------------|
| 1250 x 2050 | 0.5, 0.75, 1, 1.5, & 2 |
| 1250 x 2500 | 0.5, 0.75, 1, 1.5 & 2 |




Clear



Anti-reflective option



For technical and processing information go to brettmartin.com/marpetafs or contact our Technical Department

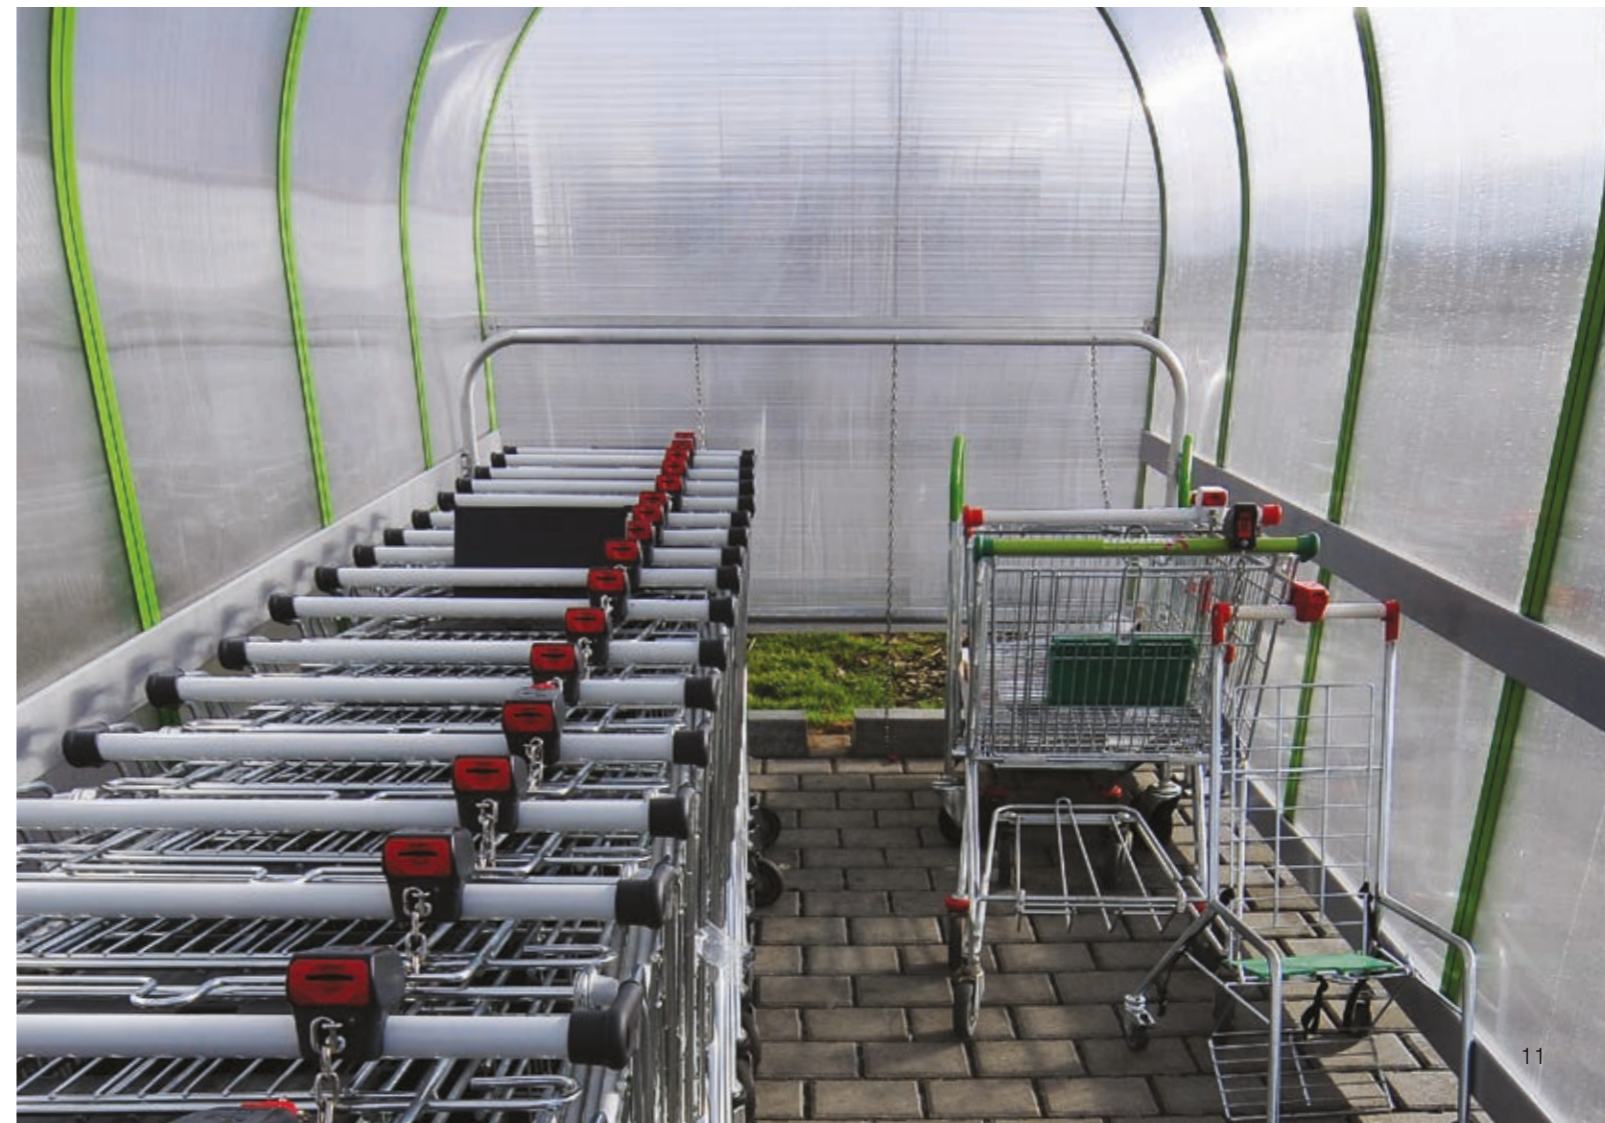

Distributed by:

1854/0721

PERSPEX



Distribution Ltd

Visit www.perspex.co.uk to request samples of our materials or to find out more information.

Your nearest Perspex Distribution Sales Branch:

BLACKBURN

Email: sales.blackburn@perspex.co.uk
Tel: 01254 272 800

CHELMSFORD

Email: sales.chelmsford@perspex.co.uk
Tel: 01245 232 800

LEEDS

Email: sales.leeds@perspex.co.uk
Tel: 01134 677 800

TAMWORTH

Email: sales.tamworth@perspex.co.uk
Tel: 01827 263 900

WEYBRIDGE

Email: sales.veybridge@perspex.co.uk
Tel: 01932 356 900

